


JBC 125 TOUCH

User Interface

- Great flexibility with 2 user interfaces to be chosen between:
- Touch: 7" touch screen selection panel with 8 customizable push buttons that offers an excellent communication space and allows to run promotional videos and images.
- 170 mm high delivery area suitable for big cups, mug or a jug.
- 100 mm high pivoting espresso cup holder.

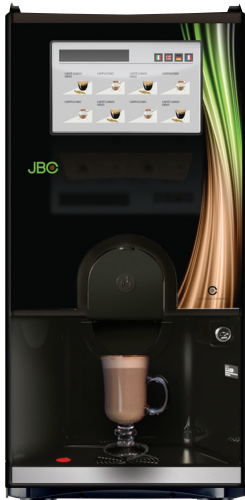

TECHNOLOGY



LED, LOW VOLTAGE
LIGHTING



PATENTED
ESPRESSO GROUP

Table top, perfect for small and multiple unit accounts.

JBC

Java Brew Collection

JBC SERIES 125 TOUCH SPECIFICATIONS

ELECTRICAL SUPPLY

AC Voltage = 120 V, 60Hz (CE compliance)

AC Voltage = 120 V, 60Hz (IEC/CB compliance)

INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the heating elements and of the pump that are powered by the mains voltage.

POWER SUPPLY

1.80 kW single boiler espresso version

1.80 kW alternating double boiler espresso version

2.80 kW double boiler espresso version


WATER SUPPLY

Fitting connection = 3/4"

Water pressure = 0.5 – 6.5 bar

JBC 125
ESPRESSO

1. COFFEE
2. CHOCOLATE
3. MILK

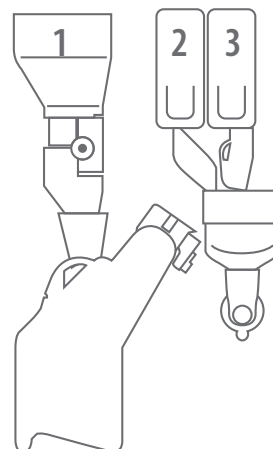

JBC SERIES 125	E2S ESPRESSO SINGLE BOILER *	E2S ESPRESSO DOUBLE BOILER *	I3S INSTANT *	I4S INSTANT *
COFFEE BEANS	1	1	-	-
INSTANT CANISTERS	2	2	3	4
DIMENSIONS	H 25.6" (650 mm) x W 12.2" (310 mm) x D 17.7" (450 mm) WEIGHT 51.1 LBS (25 kg)			
CABINET	H 35.4" (900 mm) x W 12.2" (310 mm) x D 17.7" (450 mm)			

* all versions are available with water system supply or with autonomous tank

FEATURES

- Great flexibility of configuration and a wide choice of versions with water system supply or with autonomous tank.
- Mixers are extractable to make maintenance operations easier.
- Liquid waste tray: 1 litre, easily extractable, with visible signal for maximum water level.
- Coffee waste tray: 80 pods with automatic block of the machine at reaching of maximum coffee waste level.
- Autonomous tank: 3.6 litres of water available placed behind the product canisters and possibility to fill with door closed (on the top of the machine).
- Compatible with Cashless systems, key or badge.
- Compatible with telemetry systems.
- 7" LCD Touch screen selection panel for Touch version customizable through the WinConfigTouch software.

PRODUCT CAPACITY

	single canister	double canister
Coffee beans	3 Lbs (1.35 kg)	-
Instant coffee	0.78 Lbs (0.35 kg)	1.54 Lbs (0.7 kg) (46 lt)
Milk	1.2 Lbs (0.55 kg)	3 Lbs (1.4 kg) (3.5 lt)
Chocolate	2.86 Lbs (1.3 kg)	6.6 Lbs (3 kg) (3.5 lt)

ACCESSORIES KIT

- Cabinet equipped with a storage compartment for sugar, cups, stirrers and a compartment for the positioning of autonomous tank, coffee waste tray and liquid waste bucket.
- Coffee and liquid waste bucket with visible signal (kit for cabinet).
- External coffee bean hopper extension kit (2.3 kg) in transparent ABS with locked cover.
- Water supply connection kit.
- Jug support kit.
- Separated hot water kit to prevent cross contamination i.e. drops of coffee/milk/chocolate falling into hot water cup
- up stations lighting kit
- Door lock kit Rielta.
- Second boiler kit.

ENVIRONMENT

- Backlighted keypad with led to reduce energy consumption and with a lifetime greater than neon.
- In compliance with ROHS and WEEE.

